

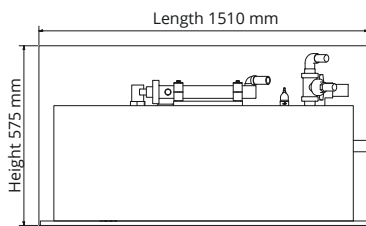
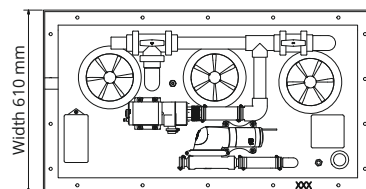


enteron 80 splitted

Tank 1

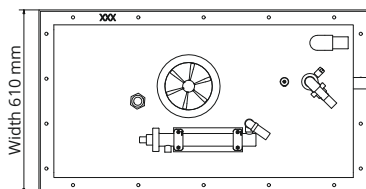


Tank 2

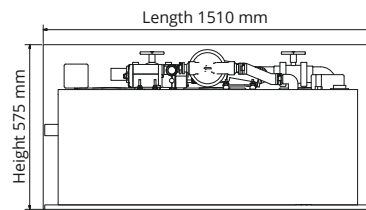

TECHNICAL DATA

Tank capacity 350 l in operation
 Weight of the plant . . . 75 kg
 Total weight ready
 for operation at least 425 kg
 Length of each tank . . . 1500 mm (clear length 1510 mm)
 Width 600 mm (clear width 610 mm)
 Height 550 mm (clear height incl. hoses 575 mm)
 Housing PEHD (tanks)
 PVC-U (valves and pipes)
 Approvals IMO/MARPOL/MEPC 227(64),
 Approval number 340.623
 Cleaning performance 80-160 l black water each day in
 normal operation
 Achieved BOD5 value . . 10 mg/l (limit value 25 mg/l) in the outlet
 Bacteria in the outlet . . 81 cfu/100 ml (limit value 100 cfu/100 ml)

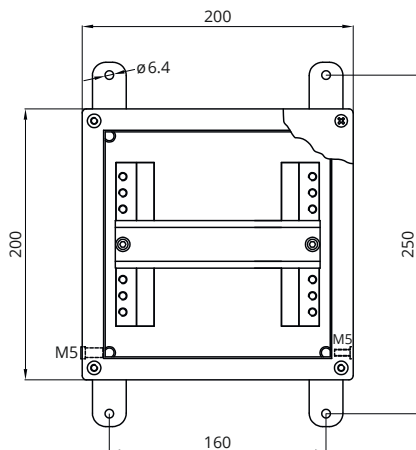

CONTROL ELECTRONICS

- fully encapsulated V4A installation housing with 2 m connected control cable and 10 m cable for remote control
- PLC control with possibility of remote maintenance and software update by installation companies
- display of operating and warning messages on a three-coloured text display
- length: 200 mm (260 mm incl. wall brackets)
- width: 200 mm
- height: 120 mm
- housing: seawater resistant stainless steel 1.4404

CONTROL SOFTWARE

- fully automated PLC control of all plant components
- operating system that cannot be manipulated by the user

REMOTE CONTROL

- length 95 mm
- width 95 mm
- installation depth 50 mm
- required cut-out 65 x 65 mm
- housing anodised aluminium