



## enteron 50

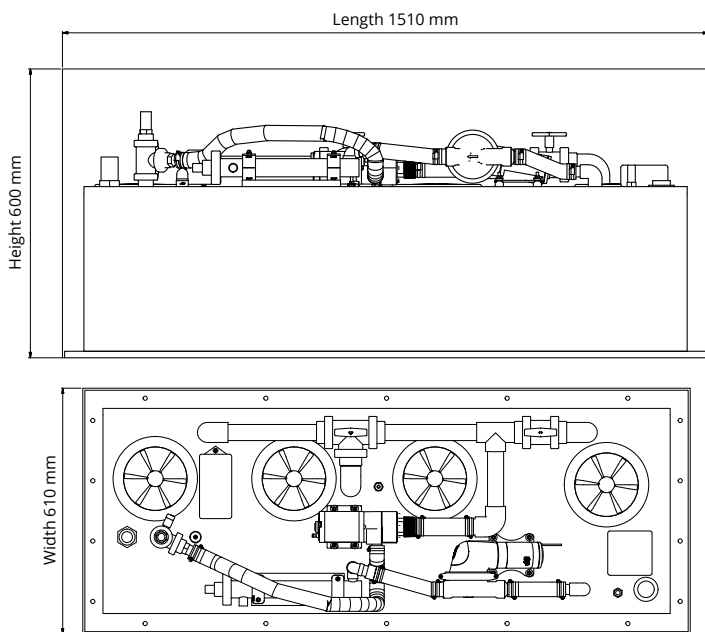

### TECHNICAL DATA

Tank capacity . . . . .	165 l in operation
Weight of the plant . . . . .	50 kg
Total weight ready for operation . . . . .	at least 215 kg
Length . . . . .	1500 mm (clear length 1510 mm)
Width . . . . .	600 mm (clear width 610 mm)
Height . . . . .	575 mm (clear height incl. hoses 600 mm)
Housing . . . . .	PEHD (tank) PVC-U (valves and pipes)
Approvals . . . . .	IMO/MARPOL/MEPC 227(64), Approval number 340.580
Cleaning performance . . . . .	50 l black water each day in normal operation
Achieved BOD5 value . . . . .	10 mg/l (limit value 25 mg/l) in the outlet
Bacteria in the outlet . . . . .	81 cfu/100 ml (limit value 100 cfu/100 ml)

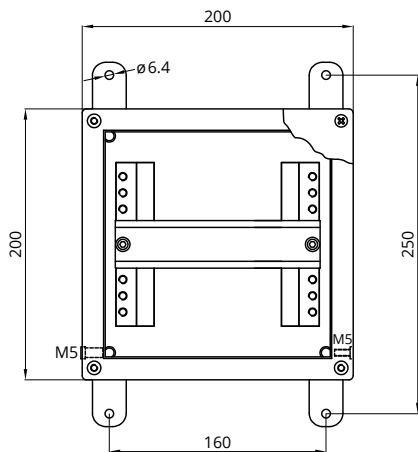

### CONTROL ELECTRONICS

- fully encapsulated V4A installation housing with 2 m connected control cable and 10 m cable for remote control
- PLC control with possibility of remote maintenance and software update by installation companies
- display of operating and warning messages on a three-coloured text display
- length: 200 mm (260 mm incl. wall brackets)
- width: 200 mm
- height: 120 mm
- housing: seawater resistant stainless steel 1.4404

### CONTROL SOFTWARE

- fully automated PLC control of all plant components
- operating system that cannot be manipulated by the user

### REMOTE CONTROL

- length . . . . . 95 mm
- width . . . . . 95 mm
- installation depth . . . . . 50 mm
- required cut-out . . . . . 65 x 65 mm
- housing . . . . . anodised aluminium